



Electrical Distributors Co.

KNOWLEDGE • SERVICE • INVENTORY
ESTABLISHED 1948

Visit Us On the Web At: www.electdist.com

SAN JOSE 95126

1135 AUZERAIS STREET

408-293-5818

FAX: 408-287-1152

GILROY 95020

7120 ALEXANDER STREET

408-847-2222

FAX: 408-847-2324

From Santa Cruz: 408-426-6464

SALINAS 93901

7 WORK CIRCLE

831-422-4786

FAX: 831-422-4846


MONTEREY 93940

2320 DEL MONTE AVE., #B

831-373-4786

FAX: 831-373-8430

Thomas & Betts

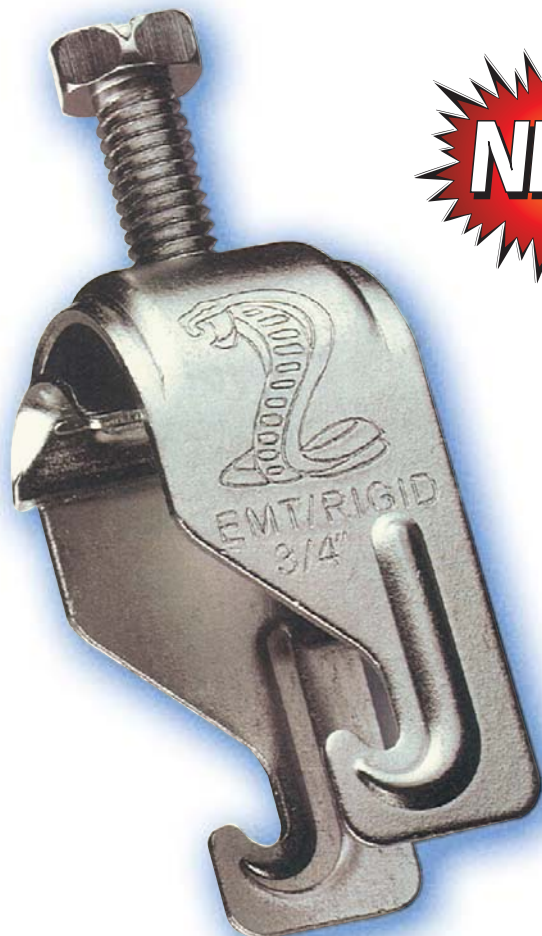

Superstrut® Cobra™ One-Piece Cable and Pipe Clamp

Takes a bite out of your installation time!

- **One-piece, heavy-duty construction** ready to install right out of the box, no need to break apart and re-assemble, no screws or bolts to drop.
- **Installs quickly and securely** using one hand.
- **Universal bolt head** accepts a range of tools.
- **Eliminates the guesswork** from clamp selection - one catalog number attaches equal trade sizes of EMT and rigid conduit.
- **Parallel hook design** keeps conduits and cable square with strut.
- **Reconfigure wiring without complete disassembly.** Removes cables easily without disturbing neighboring clamps.

Simple Product Selection, Solid Installation

- **Clear markings on each clamp** identify the catalog number, min./max. outer cable diameters, EMT/Rigid trade sizes, CSA and UL stamps.
- One size clamp works on **equal trade sizes for both EMT and rigid conduit.**
- Works with all **depths of strut – 13/16" to 3-1/4".**
- **Two hooks on the same side** make the clamp easy to install and keep conduits and cable square with strut.
- **Rugged stirrup and wide saddle design** holds securely with no damage to conduit or cable.
- **Suggested design load** is 200 lbs. (1/2" to 2"); 350 lbs. (2-1/2" to 4"). Safety factor 4:1 (safety factor = ratio of ultimate load to the design load).
- **Heavy-duty 5/16" hex bolt** with multi-driver head (Robertson square, Phillips cross-recess and slot) provides full range of installation options. Virtually any tool will work!
- **Bright zinc finish** – clamps are electrogalvanized after fabrication for additional durability.



Multi-driver combination bolt head accepts a wrench, screwdriver or nut driver.



Attaches a full range of EMT, rigid conduit and cable to strut channels.



Remove cable or pipes easily without disturbing neighboring clamps.



1. Hook clamp into strut channel and hand tighten.



2. Tighten bolt.



Ordering Information

Cat. Number	For EMT and Rigid Conduit Trade Size	Cable O.D. Range (in.)	Static Load Limit (lb) Safety Factor = 4	Quantity per Box	UPC Number
Electro Galvanized Steel					
CPC050	1/2"	0.650 - 0.890	200	100	61601310698
CPC075	3/4"	0.860 - 1.110	200	100	61601310700
CPC100	1"	1.100 - 1.400	200	100	61601310702
CPC125	1-1/4"	1.400 - 1.725	200	50	61601310704
CPC150	1-1/2"	1.690 - 1.980	200	50	61601310706
CPC200	2"	1.980 - 2.576	200	50	61601310708
CPC250	2-1/2"	2.576 - 3.060	350	25	61601310710
CPC300	3"	3.060 - 3.626	350	25	61601310712
CPC350	3-1/2"	3.626 - 4.126	350	25	61601310714
CPC400	4"	4.126 - 4.626	350	25	61601310716

Don't forget to stop by the San Jose branch Wednesday, July 20th for breakfast and to see this new product!